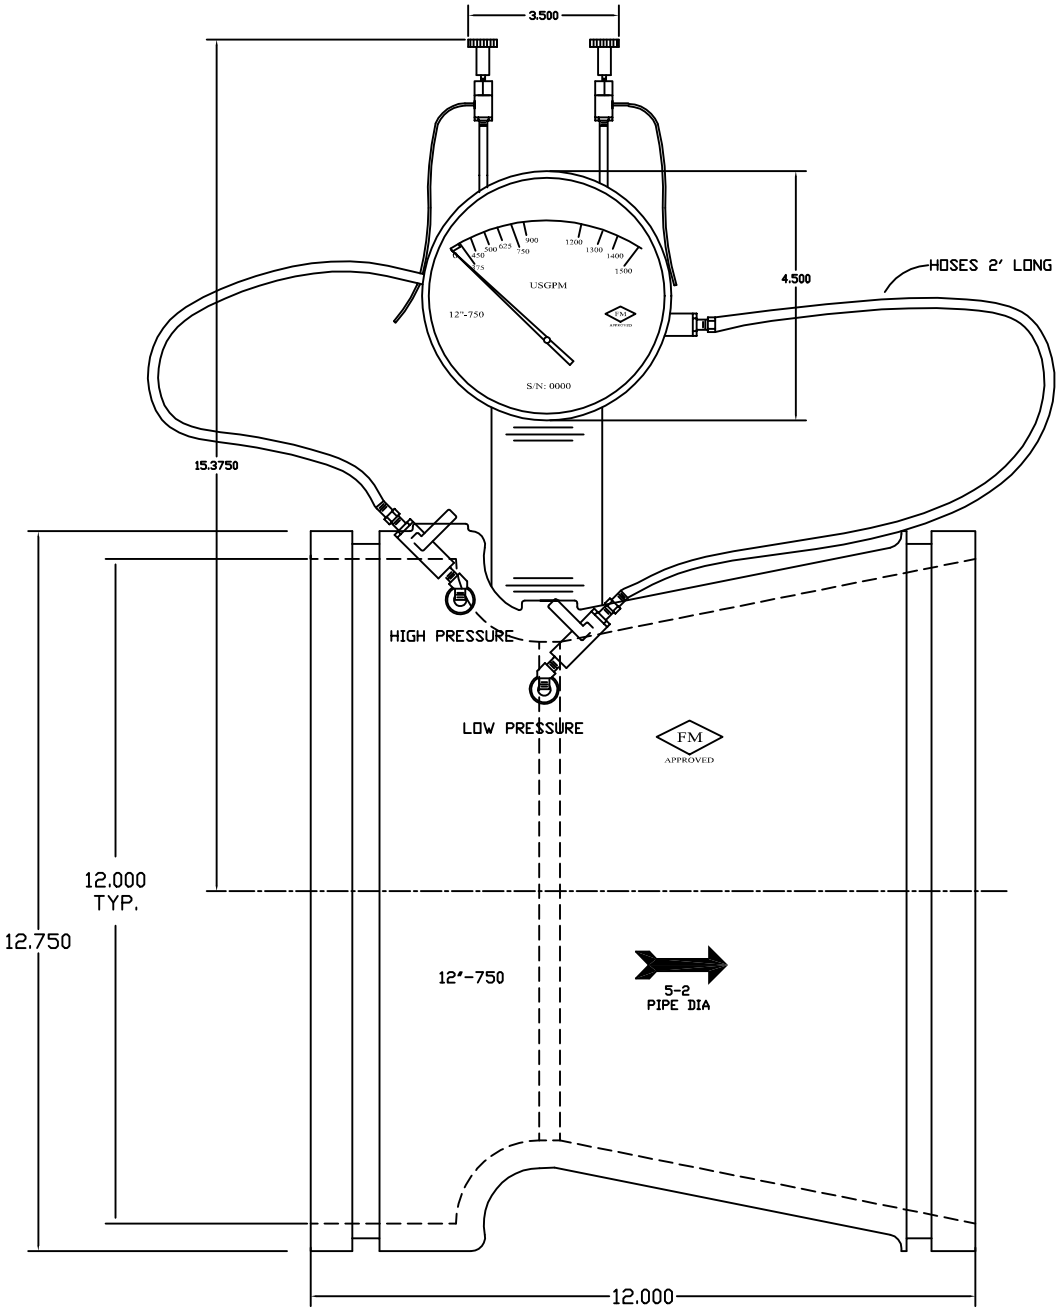

TECHNICAL DATA

STANDARD MATERIALS OF CONSTRUCTION
316 STAINLESS STEEL
VENTURI FIRE PUMP TEST METERS

VENTURI:	316L "MACHINED" STAINLESS STEEL CASTING
METER:	4.5" DIAL, (BUNA-N) SEALS, 316 SS BODY, CASE AND WETTED PARTS
VALVES:	316 SS 600 WOG BALL VALVES
FITTINGS:	
ON VENTURI	316SS 1/4" FITTING & VALVES ON VENTURI
&	
ON METER	316 SS 1/4" FITTINGS & VALVES ON METER
HOSES:	(2) 1/4" SS BRAIDED HOSES WITH TEFLON ID

316 STAINLESS STEEL

0-17,000 USGPM / 64,345 LPM

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

GLOBAL VISION INC.
8800 JEFFERSON HWY
OSSEO, MINNESOTA 55369
763 - 391 - 0990

FIRE PUMP ASSEMBLY
12" - 750 GROOVED

DATE:	09/13/08
SCALE:	NTS
DWG #	GVIFP-12-G-SS
APPROVED	