METER DATA



CONSTRUCTION:	ALUMINUM BODY ASTM B211-03
OPERATION:	DIAPHRAGM (BUNA CONVOLUTED)
ACCURACY:	+ 2% FULL SCALE
TEMPERATURE:	180°F / 80°C
PRESSURE:	500 PSIG - 3450 KPA
APPROX. WEIGHT:	3.75 LBS (1.7 KGS)

4" DIAL STANDARD - 6" DIAL AVAILABLE

CONSTRUCTION & SPECIFICATIONS

MATERIALS:	MACHINED 1026 CARBON STEEL ASTM A-106 - B/C HRS or ASTM A-216 Gr. WCB CAST STEEL
VALVES:	1/4" BRASS BALL Rated @ 600 WOG Body: ASTM-B584 Tail Piece: ASTM B16 C36600 Ball: ASTM B16 C36600 (HARD CHROME PLATED)
BRASS FITTING:	ASTM B16 C36600 Meets functional requirements of the SAE J530, SAE J531 and ASA.
ID TAG:	POLYCARBONATE
HOSES:	Good Year® Hoses Rate at 750 PSI WP

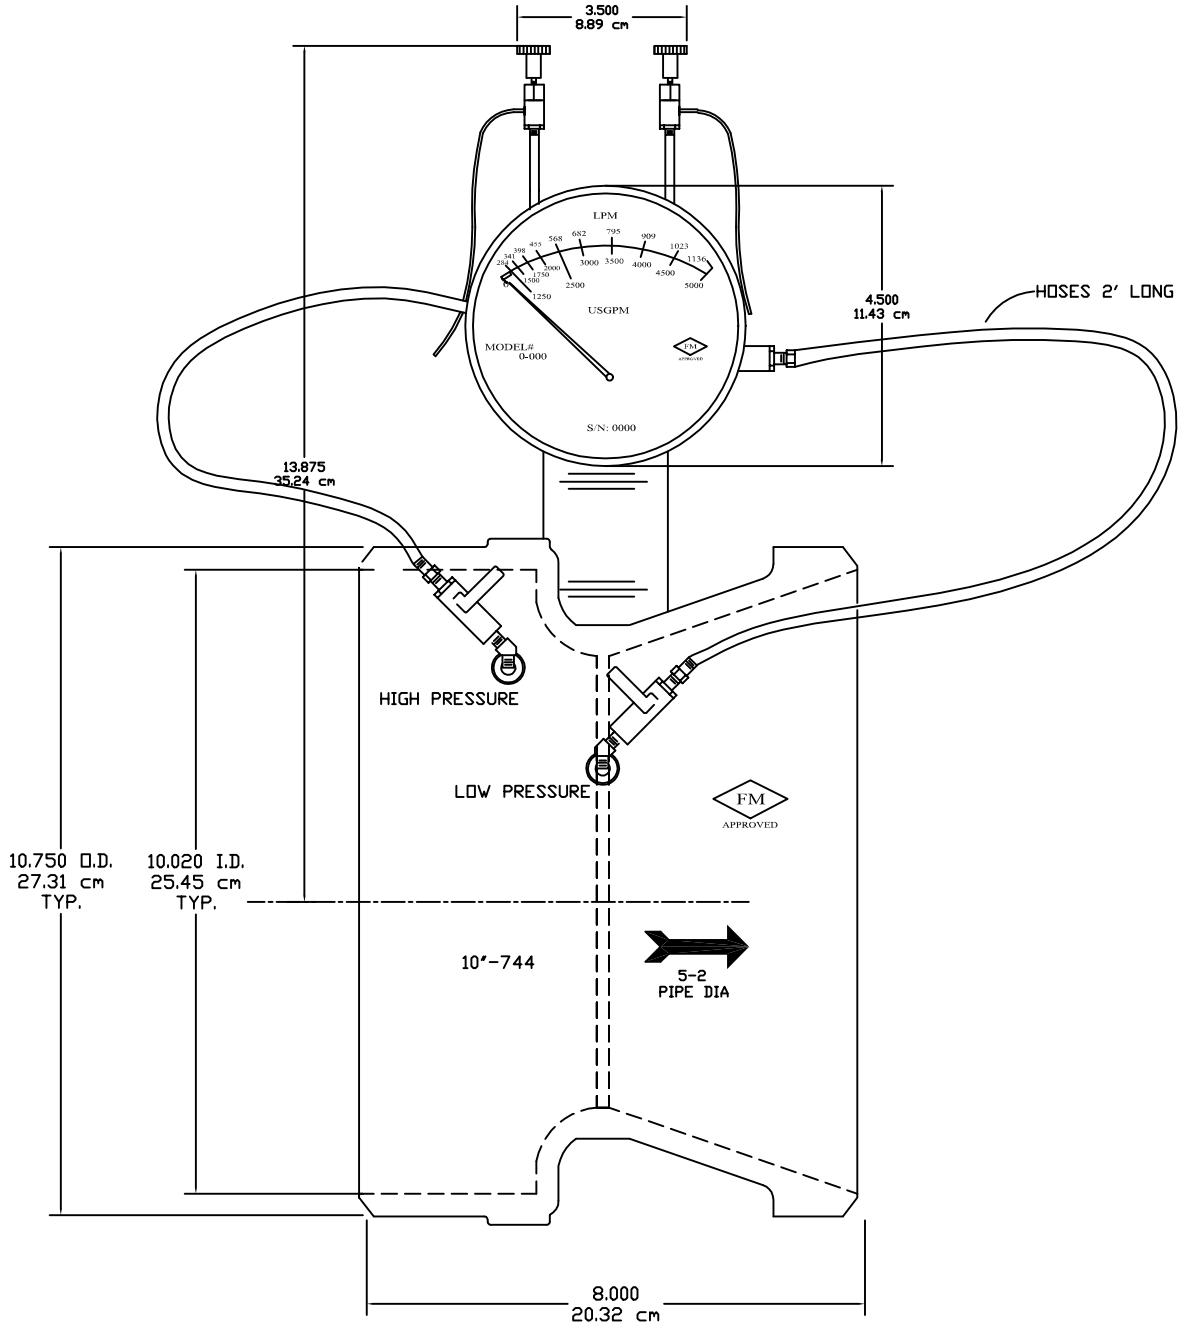

CERTIFIED BY CHARLES P. SUTTON - PRESIDENT

GLOBAL VISION INC.

8800 JEFFERSON HWY
OSSEO, MINNESOTA 55369
763 - 391 - 0990

FIRE PUMP ASSEMBLY
10" BUTTWELD

R-1	10/04/08	ADDED NOTES/ MET DIMS	DATE:	09/13/08
			SCALE:	NTS
			DWG #	GVIFP-10-BW
			APPROVED	CPS